


BAVONO SNR-600MNI-X 700TVL Mini Dome Camera



Product Wiring Diagram

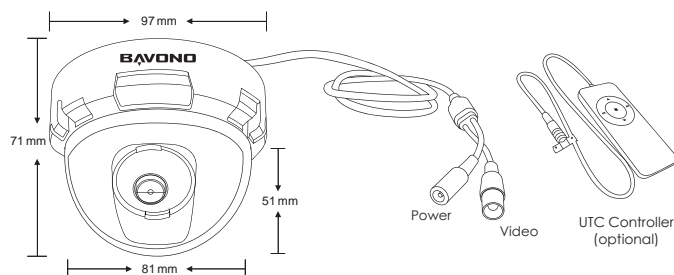

MENU OPERATION

01



Menu Operation

Connect UTC controller to the video end of the cable to enable remote OSD control

- Press [SET].
The Menu screen appears on the monitor.
Check the current settings on the menu.
- Use [UP] or [DOWN] button to select the [EXIT] then use [LEFT] or [RIGHT] button to select a mode.
-EXIT: Exit the setup menu.

EXPOSURE SETTINGS

02



ALC	BRIGHTNESS	0-20
	SHUTTER	INDOOR, OUTDOOR, 1/100, 1/120 ~ 1/120K
	FLK	OFF / ON
ELC	AGC	OFF / ON (1-20)
	IRIS SPEED	0-20
	BRIGHTNESS	0-20
	SHUTTER	AUTO, 1/50, 1/60 ~ 1/120K
	FLK	OFF / ON
	AGC	OFF / ON (1-20)

DAY & NIGHT SETTINGS

03



AUTO	AGC THRS	0-20
	AGC MARGIN	0-20
	D/N DELAY	0-15 sec
DAY	B/W BURST	OFF / ON
	SMART IR	ANTI-SAT: off-20, SAT AREA: 0-20
	B/W BURST	OFF / ON
NIGHT	SMART IR	ANTI-SAT: off-20, SAT AREA: 0-20
	EXTERN S/W	LOW / HIGH
	D/N DELAY	0-15 sec
EXTERN	B/W BURST	OFF / ON
	SMART IR	ANTI-SAT: off-20, SAT AREA: 0-20
	CDS D->N	0-20
CDS	CDS N->D	0-20
	D/N DELAY	0-15 sec
	B/W BURST	OFF / ON
	SMART IR	ANTI-SAT: off-20, SAT AREA: 0-20

WHITE BALANCE SETTINGS

04



ATW	
PUSH	PUSHING
MANUAL	RED (0-20), BLUE (0-20)

DISPLAY ADJUSTMENT SETTINGS

05



GAMMA	0.35 ~ 0.70
CHROMA	0-20
SHARPNESS	0-20
DE-BACK NOISE	0-10
SHADING	0-20
RESOLUTION	0-15
WARM COLOR	0-20
COOL COLOR	0-20

IMAGE SETTINGS

06



BACKLIGHT	OFF	
	BLC	Level(Low/Middle/High), Display (Off/On), Position (Top/Bottom/Left/Right)
CONTRAST	OFF	
	WDR	Auto, Manual, Level (Low, Middle, High)
POSI/NEGA	DEFOG	Auto, Manual, Level (Low, Middle, High)
	POSI, NEGA	
H-MIRROR	OFF	
	POSI	
PRIVACY	ON	Mask LV (12 Color), Area No (1-8), Display (Off/On), Position (Top/Bottom/Left/Right)

DNR SETTINGS

07



DNR	OFF / LOW / MIDDLE / HIGH
-----	---------------------------

MOTION DETECTION SETTINGS

08



OFF / ON	SENSITIVITY	0-30
	AREA NO.	1 ~ 4
	AREA USE	OFF / ON
	POSITION	TOP/BOTTOM/LEFT/RIGHT

SYSTEM SETTINGS

09



CAM TITLE	OFF / ON	
CAM ID	0 ~ 255	
ID DISPLAY	OFF / ON	
SYNC	INT / L/L(AC Power)	
BAUDRATE	2400/4800/9600/57600/115200	
PROTOCOL	PELCO-D / PELCO-P	
LANGUAGE	ENGLISH / CHINESE	
SPECIAL	DEFECT DETECTION	
	FONT COLOR	1-8
	VERSION	

Specifications

Model	SNR-600MNI-X
Video Standard	NTSC / PAL
Image Sensor	1/3" Sony Super-HAD II CCD
Total Picture Elements	1020(H) X 508(V) / 1020(H) X 596(V)
Effective Picture Elements	976(H) X 494(V) / 976(H) X 582(V)
Synchronizing System	Internal, AC Line Lock
Horizontal Resolution	Color: More than 700 TVL B/W: More than 800 TVL
Minimum Illumination	Color: 0.05 Lux@F1.2(50IRE) / 0.06 Lux(15IRE) B/W: 0.01Lux@F1.2(50IRE) / 0.006 Lux(15IRE)
Video S/N Ratio	52dB
OSD Language	English / Simplified Chinese / Traditional Chinese
Day / Night Mode	Auto / Day / Night / Ext / CDS
Highlight Compensation (HLC)	Low / Middle / High
High Speed Shutter	Indoor Outdoor (1/60(1/50) ~ 1/120Ksec)
Flickerless Mode	OFF / ON
WDR	AUTO / MANUAL (Low / Middle / High)
Auto Gain Control (AGC)	Level Setting
ALC (Auto Level Control)	All Lens (DC)
Defog	AUTO / MANUAL (Low / Middle / High)
Digital Noise Reduction (DNR)	Off / Low / Middle / High (Adaptive 2D)
Gamma	0.35 ~ 0.70
White Balance	ATW / Push / Manual
Camera No. / ID	Off / On (Max. 255 NO, 8ea ID/1 Line)
Motion Detection	4 zones (On/Off, Position, Sensitivity)
Privacy Masking	8 zones (On/Off, Color, Position)
Lens	2.8 / 3.6 / 6 mm
Video Output	VBS 1.0V p-p (75ohm Terminated)
Power Input	DC12V ± 10%
Power Consumption	Less than 1.2W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	Less than 90%
Shell Material	Plastic
Shell Color	Black

Note

- Please use the connector of the camera to a DC 12V regulated power supply.
- The tolerance of this unit is DC 12V ± 10 %
- Over the maximum DC 12V power input will damage the video output connector (VIDEO OUT)



CAUTION
RISK OF ELECTRIC SHOCK



Caution:

To reduce the risk of electric shock, do not expose this apparatus to rain or moisture. Only operate this apparatus from the type of power source indicated on the label. The company shall not be liable for any damages arising out of any improper use, even if we have been advised of the possibility of such damages.